

YESTERDAY, TODAY AND IN THE FUTURE

BROAD PERSPECTIVE

- When the main focus is on effectiveness
- Individual solutions with a high integration level and maximum benefits
- Installation is simple and fast:
low-maintenance, robust and durable in use



© iStockphoto



PAPENMEIER QUALITY

- DIN EN ISO 9001: 2015, TÜV NORD
- Dekra/Exam according to ATEX 2014/34/EU



Not the right one?

Lumiglas is your partner for constructive project planning in visual observation. From the CAD drawing via the model to the finished product.

Our worldwide sales network offers you advice and support in local languages.

Feel free to contact us!

Lumistar Luminaire ESL 53LED Ex

The small system luminaire
for hazardous areas



Technical changes reserved. 02.22
Picture credits: © sbck.adobe.com; F.H. Papenmeier GmbH & Co. KG

PAPENMEIER
●●●●●

F.H. Papenmeier GmbH & Co. KG, Talweg 2, 58239 Schwerte,
Germany • Phone: +49 2304 205 0 • Fax: +49 2304 205 205
info@lumiglas.de • www.lumiglas.de

technologically leading - humanly close


PAPENMEIER
Lumiglas

PROCESS LIGHTING AND VISUAL CONTROL SYSTEMS

Lumistar Luminaire ESL 53LED Ex



Small size – maximum security

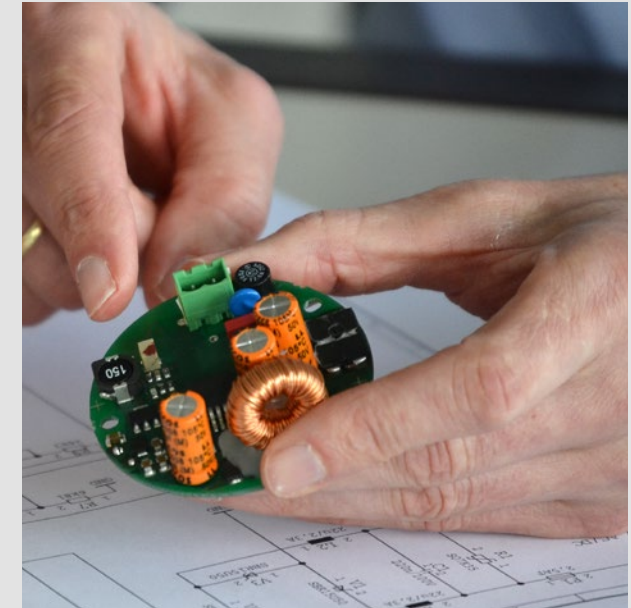

PRODUCT

- The combination of compact construction and hygienic design make the Lumistar Luminaire ESL 53LED Ex a flexible sight glass luminaire
- The processing fulfils the requirements of the European Directive 2014/34/EU
- ATEX certified
- Can be used in potentially hazardous areas
- Gas: Zone 1 and 2; Dust: Zone 21 and 22



APPLICATION

- The safe luminaire solution for hazardous areas in the chemical, pharmaceutical, biogas and food processing industries
- Optimal for illumination of boilers, tanks, agitators, silos and other generally enclosed normally containers and reactors



TECHNICAL DATA

- Use in environment temperatures of max. 40°C/T6 and max. 50°C/T4
- Trend-setting LED technology
- Light colour: 5700 K daylight white, other light colours on request
- Beam angle: 19°
- Luminous flux: 500 lm
- Protection class IP 65 and IP 67 according to DIN EN 60529
- 24 V AC/DC - 7 W
- Total length: 165 mm, diameter: 53 mm