

Rod ends with male thread:  
EARM and EALM



- Maintenance-free dry operation
- Robust
- Durable in varying loads
- Compensation of misalignment errors
- Resistant to edge loads
- Resistant to dirt, dust and lint
- Resistant to corrosion and chemicals
- Vibration-dampening
- Suitable for rotating, oscillating and linear movements
- Lightweight
- Dimensional E series according to DIN ISO 12240
- For temperatures up to +200°C we recommend EARM-HT and EALM-HT ► Page 761

Service life calculation online  
► [www.igus.eu/igubal-expert](http://www.igus.eu/igubal-expert)

Technical data

Part No.	Max. static tensile strain		Max. static axial force		Min. thread depth Thread [mm]	Max. tightening torque Male thread [Nm]	Max. tightening torque through ball [Nm]	Weight [g]
	Short-term	Long-term	Short-term	Long-term				
	[N]	[N]	[N]	[N]				
EA□M-05	550	275	50	25	14	0.4	2.0	2.2
EA□M-06	850	425	80	40	14	0.5	2.5	2.7
EA□M-08	1,600	800	160	80	17	2.0	7.0	5.1
EA□M-10	2,600	1,300	250	125	19	5.0	14.0	8.4
EA□M-10 F	2,600	1,300	250	125	19	3.0	14.0	8.4
EA□M-12	3,100	1,550	300	150	20	6.0	25.0	14.3
EA□M-12 F	3,100	1,550	300	150	20	6.0	25.0	14.3
EA□M-15	3,400	1,700	600	300	24	12.5	30.0	21.1
EA□M-17	3,600	1,800	900	450	26	17.5	35.0	30.2
EA□M-17 F	3,600	1,800	900	450	26	21.0	35.0	30.2
EA□M-20	6,800	3,400	1,700	850	30	25.0	40.0	57.3
EA□M-20 M20	6,800	3,400	1,700	850	30	25.0	40.0	57.3
EA□M-25	7,000	3,500	1,000	500	37	45.0	55.0	94.8
EA□M-30	7,000	3,500	2,000	1,000	46	85.0	70.0	156.4

Alternative spherical ball materials ► Page 841



J4VEM:  
Clearance-free,  
pre-loaded



JEM: Low  
moisture  
absorption




REM:  
Low-cost



J4EM:  
Low-cost and low  
moisture absorption

Rod ends with male thread:  
EARM and EALM

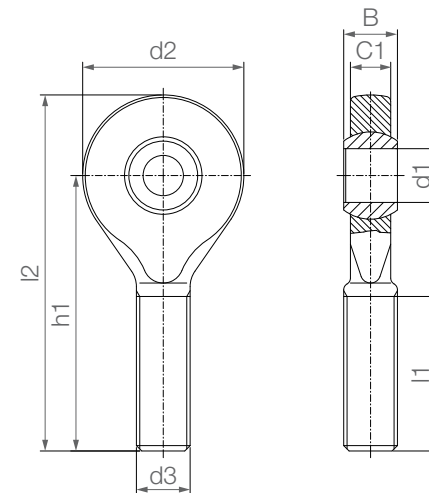

Order key

Type	Size [mm]	Options
E A □ M - 05		
E series		
Housing (male thread)		
Thread		
Metric		
Inner Ø		
		Thread L = Left-hand thread R = Right-hand thread

Material:  
Housing: igumid G ► Page 1654  
Spherical ball: iglidur® W300 ► Page 171  
Other spherical ball materials upon request  
► Page 841

Dimensions [mm]

Part No.	d1 E10	d2	d3	C1	B	h1	l1	l2	Max. pivot angle
EA□M-05	5	19	M5	4.4	6	36.0	20	45.5	33°
EA□M-06	6	21	M6	4.4	6	36.0	20	46.5	27°
EA□M-08	8	24	M8	6.0	8	41.0	24	53.0	24°
EA□M-10	10	29	M10	7.0	9	47.5	27	62.0	24°
EA□M-10 F	10	29	M10 x 1.25	7.0	9	47.5	27	62.0	24°
EA□M-12	12	34	M12	8.0	10	54.0	29	71.0	21°
EA□M-12 F	12	34	M12 x 1.25	8.0	10	54.0	29	71.0	21°
EA□M-15	15	40	M14	10.0	12	63.0	34	83.0	21°
EA□M-17	17	46	M16	11.0	14	69.0	37	92.0	18°
EA□M-17 F	17	46	M16 x 1.5	11.0	14	69.0	37	92.0	18°
EA□M-20	20	53	M20 x 1.5	13.0	16	80.0	43	106.5	16°
EA□M-20 M20	20	53	M20 x 2.5	13.0	16	80.0	43	106.5	16°
EA□M-25	25	64	M24 x 2.0	17.0	20	97.0	53	129.0	16°
EA□M-30	30	73	M30 x 2.0	19.0	22	113.0	65	149.5	13°

For another spherical bearing material than iglidur® W300, please add "J" to the part number, for example. Example: EARM-05 J.