



Proximity switches for valves



(End-of-line and inline armatures with and without KITO® flame arrester)

Application

If an indication is desired or required (e. g. VdTÜV-guideline 967, §9.2.2.2), if the valve disk is in the position „closed“ or if a signal should be given if the valve opens.

Example

KITO® DS/oP-...

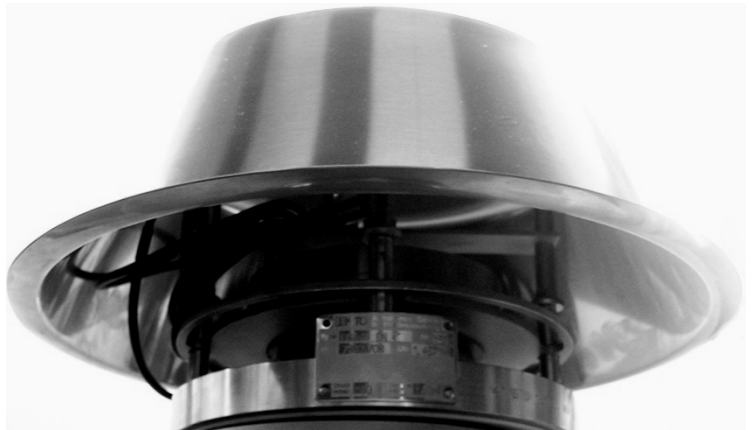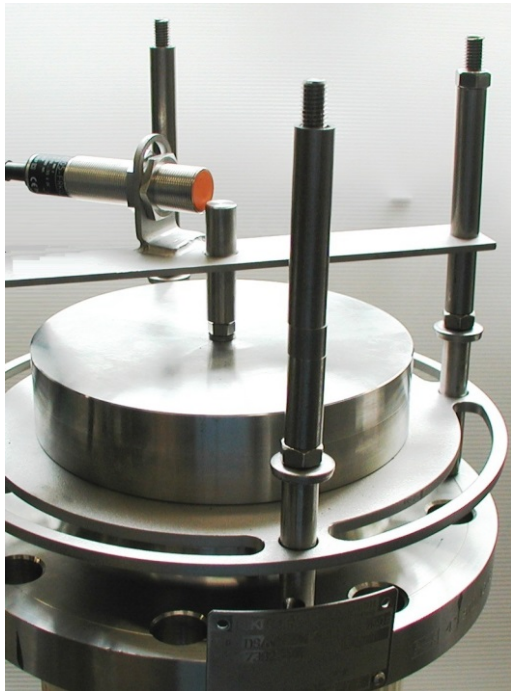

KITO® VD/Sc-...



For pressure valves with KITO® flame arrester element upon consultation with KITO®.

Design

	standard	optionally
installation	outside on valve body, adjustable in one or two directions, switching release by lifting movement	
funktion	inductive, non-contact	Switch type according to customer specifications
operating voltage	5-25 or 10-55 V DC	
starting function	normally closed or normally open	
type of protection	IP 67	
housing material	stainless steel	
adm. temperature	-25 bis 70 (80) °C	