



HENNLICH

MERES

# VŘETENOVÝ PRŮTOKOMĚR OMNIPLUS-VHSX

## Flow transmitter Screw volumeter OMNIPLUS-VHSX



- Measures and monitors viscous media (oil) 1.4..1500 l/min
- High accuracy
- Low viscosity dependence
- Can be used up to 40,000 mm<sup>2</sup>/s (cSt)
- Analogue output and two limit switches

### Characteristics

The flow transmitters of the OMNIPLUS-VHSX series are suitable for liquid, viscous, lubricating media (e.g. lubricating oil).

The measurement is carried out volumetrically by two interlocking screws, which rotate in opposite directions driven by the flowing medium.

Due to the volumetric measurement method, the devices operate almost independently of viscosity.

A sensor located outside the flow chamber detects the screw flanks and generates a flow-proportional frequency signal. A pulse thus corresponds to a certain measuring volume. There are no magnets in the flow space. The devices can be operated bi-directionally. The flow direction is detected by the electronics and shown on the display. The integrated totalizer works adding or subtracting depending on the direction of flow.

The integrated electronics have an LCD display as well as an analog output and two switching outputs and can be easily configured by the user.

The bodies of the devices are made of aluminum, the connections are made of either aluminum or steel. SAE flanges, which simplify installation in the pipeline, are available as accessories.

In addition to the version presented here, other versions are available:

**LABO-VHSX** without display, adjustable analog output  
**VHSX** direct frequency output, not adjustable

### Specifications


<b>Meas. principle</b>	Screw volumeter
<b>Nominal size</b>	DN25...DN50
<b>Connection type</b>	Female thread G 1...G 2
<b>Ranges</b>	see table
<b>Measurement uncertainty</b>	±1 % of reading at 20 mm <sup>2</sup> /s in the specified measuring range

<b>Compressive strength</b>	with aluminium ports	PN160
	with aluminium ports and SAE flange	PN350
	with steel port with or without SAE flange	PN350
<b>Media</b>	Oil or other non-aggressive, lubricating fluids	
<b>Media temperature</b>	-20...+85 °C	
<b>Ambient temp.</b>	-20...+70 °C	
<b>Storage temperature</b>	-25...+85 °C	
<b>Materials wetted with media</b>	Housing	aluminium
	Ports	aluminium optional steel
	Measuring screws	steel
	Gaskets	FKM
<b>Supply voltage</b>	18...30 V DC	
<b>Current consumption</b>	< 130 mA (SIO mode, unloaded outputs)	
<b>IO-Link specification</b>	IO-Link revision	V1.1
	Bit rate	COM2 (38400 bit/s)
	Minimum cycle time	20 ms
	SIO mode	yes
	Port class	A compatible
	Block parameterization	yes
	Data storage	yes
<b>Analog output</b>	Current:	4...20 mA 0...20 mA
	Voltage:	0...10 V 2...10 V 0...5 V 1...5 V 0.5...4.5 V
<b>Switching outputs</b>	2 transistor outputs push-pull, parameterizable as NPN o.C. Short-circuit and reverse polarity resistant I <sub>out</sub> = 100 mA max per output	
	Configurable on the device as	
	<ul style="list-style-type: none"> <li>● Limit switch</li> <li>● Frequency output</li> <li>● Pulse output</li> <li>● Signal output for preset counter</li> </ul>	
<b>Display</b>	1.2" graphic LCD (transflective) 128 x 64 pixels backlight white, red on alarm message	
<b>Electr. connection</b>	M12x1 circular connector, 5-pin	
<b>Protection class</b>	IP65 / IP67	
<b>Conformity</b>	CE	

### Connection diagram

connector M12 x 1

pin assignment

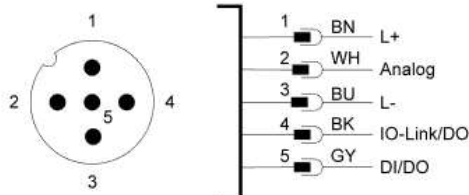

# VŘETENOVÝ PRŮTOKOMĚR OMNIPLUS-VHSX



## Ranges

OMNIPLUS-VHSX-	Nominal size	Range 1...100 % Q <sub>nom</sub>	Q <sub>max</sub>	Primary signal		Pressure loss appr. at Q <sub>nom</sub> in bar						
				l/min	l/min	Volume/Pulse cm <sup>3</sup>	Pulses/Liter	at viscosity in mm <sup>2</sup> /s				
								2	22	50	170	1000
...025...0140	●	DN 25	1.4... 140	200	13.10	76.340	0.5	0.9	1.5	3.0	15	
...032...0350	●	DN 32	3.5... 350	500	29.00	34.480	0.8	2.0	2.8	5.8	26	
...040...0550	○	DN 40	5.5... 550	800	48.58	20.590	1.4	2.6	4.2	8.4	30	
...040...0800	●		8.0... 800	1200	72.00	13.890	1.7	3.1	4.8	9.7	32	
...050...1000	○	DN 50	10.0...1000	1600	103.63	9.650	2.0	3.5	5.3	11	35	
...050...1500	●		15.0...1500	2200	133.00	7.519	2.5	4.5	6.4	14	48	


● = standard ○ = option

## Dimensions and weights

OMNIPLUS-VHSX-	G	X1	L1	ØD	A	M	X2	B	C	L2	H	E	F	Weight with ports made of	
														aluminium kg	steel kg
...025...0140	● G 1	20	220	88	49.0	12	20	57.1	27.8	324	52	80	69	3.74	5.06
...032...0350	● G 1¼	22	285	103	55.0	14	22	66.7	31.6	381	48	94	77	6.65	8.80
...040...0550	○ G 1½	24	332	122	58.8	16	24	79.4	36.5	448	58	106	89	10.80	13.90
...040...0800	●		340	138	66.5					456				14.50	18.80
...050...1000	○ G 2	33	396	155	71.0	20	35	96.8	44.4	544	74	135	116	21.00	28.00
...050...1500	●		405	168	77.3					553				25.30	33.50

without SAE flange

with SAE flange

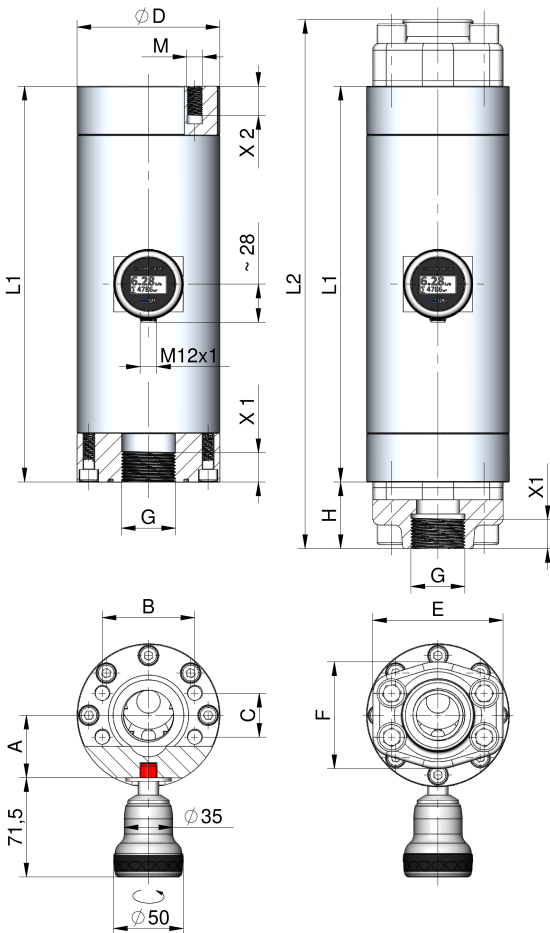

## Order codes

OMNIPLUS-VHSX -  1.  2.  3.

● = standard ○ = option

1. Nominal size	
025	DN 25 - G 1
032	DN 32 - G 1¼
040	DN 40 - G 1½
050	DN 50 - G 2
2. Port material	
A	● aluminium anodized
S	○ steel
3. Measurement range	
0140	● 1.4... 140 l/min
0350	● 3.5... 350 l/min
0550	○ 5.5... 550 l/min
0800	● 8.0... 800 l/min
1000	○ 10.0...1000 l/min
1500	● 15.0...1500 l/min

## Accessories

### SAE flanges

Order code	Weight (per pair)
SAE-VHSX-025	1 Paar für VHSX-025 2.3 kg
SAE-VHSX-032	1 Paar für VHSX-032 3.2 kg
SAE-VHSX-040	1 Paar für VHSX-040 4.6 kg
SAE-VHSX-050	1 Paar für VHSX-050 9.6 kg

Cable with circular connector M12x1 (not included)